





FLOWAY® VTSP
Vertical Turbine Solids Pump


The first of its kind, the Floway® Vertical Turbine Solids Pump (VTSP) is specifically designed to handle solids up to 10% by weight, while providing superior abrasion resistance running smoothly.




- Shaft seal features:
- Mechanical seal designed for solids handling services
 - Isolation device to keep solids away from seal
 - No leakage, no adjustment required
 - No external flush required



- Threaded or double keyed shaft couplings as required
- 416 SS or 17-4-PH metal shafting
- Hard-coated shaft in bearing area
- Fabricated flanged column sections



- Hard-coated shaft in bearing area
 - Cast iron bowls with abrasion resistant coating on hydraulics
- Floway VTSP bearing assembly features:
- Grease packed and sealed from pumpage
 - Staged seal design for extended wear life
 - Hard-coated shaft and bearing journals
 - No external flush required
 - Patented design
- 316 SS collets
- Semi-open impeller features:
- Adjustable as pump wears to maintain performance without disassembly
 - Hardened stainless steel material for increased abrasion resistance and extended wear life
 - No wear-rings to wear out

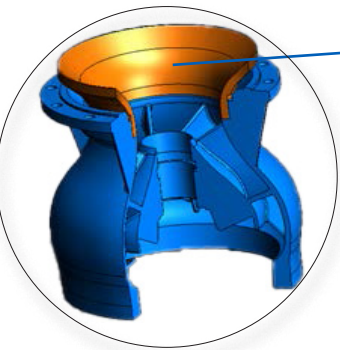

- VTSP Removable Wear Plate
- Increases bowl wear life
 - Prevents premature bowl replacement
 - Overall lower maintenance costs
 - Replacement part



Typical Applications

(sump, barrel or barge mounted)

- Mine de-watering
- Tailings
- Reclaim water
- Overflow water
- Seepage
- Process water supply
- Waste water feed
- Thickener overflow
- Barrel mounted booster
- Barge mounted pumps
- Water supply (fresh water, lakes, and rivers)


Proven durability, longer wear, and less maintenance.

Floway VTSP Specifications	
Capacity	up to 35,000 usgpm (8,000 m ³ /hr)
Pressure Limit	500 psi (35 bars)
HP Range	up to 2,500 hp (1,850 kw)
Liquid Handled	Various liquids containing suspended solids with pH of 4-10
Solids Limit	10% by weight, with excursions up to 20% by weight
Particle Size	up to 1 mm
Temperature / SG Limit	up to 175o F (80o C) / 1.2 SG





The Floway VTSP is designed to reduce wear and extend operating life, resulting in less maintenance down-time, fewer spare parts requiring replacement, and lowering total cost of ownership.

Floway Coverage Chart 50Hz

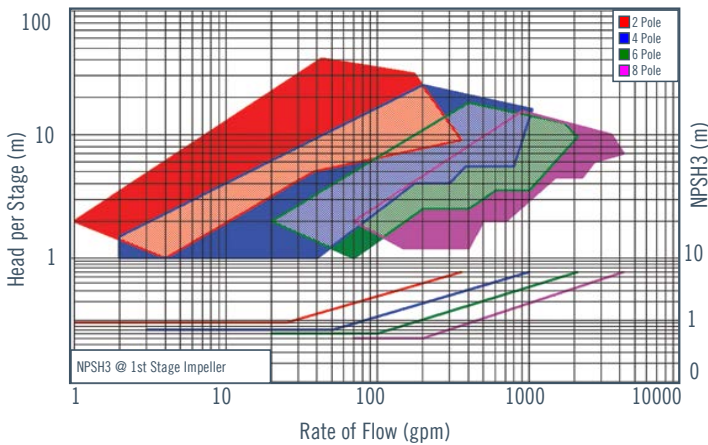

Floway Coverage Chart 60Hz

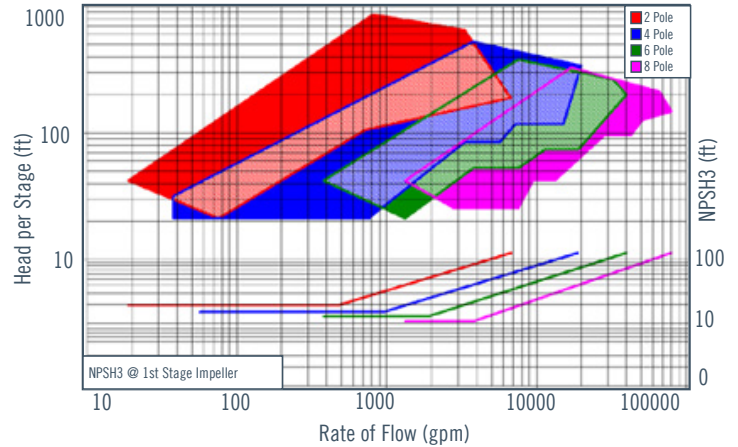

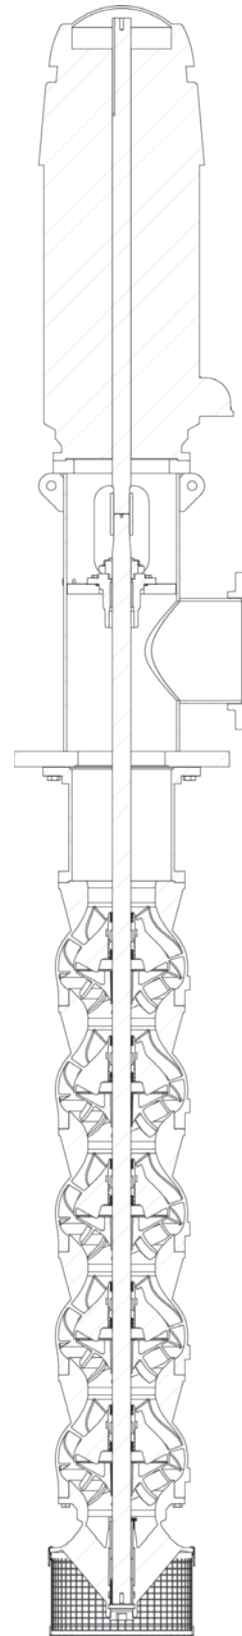

Trillium Pumps USA INC

2494 S Railroad Avenue, Fresno, California 93706 USA

T: (559) 442-4000 floway@trilliumflow.com

www.trilliumflow.com