


Omega / Omega V – Axially Split Volute Casing Pump

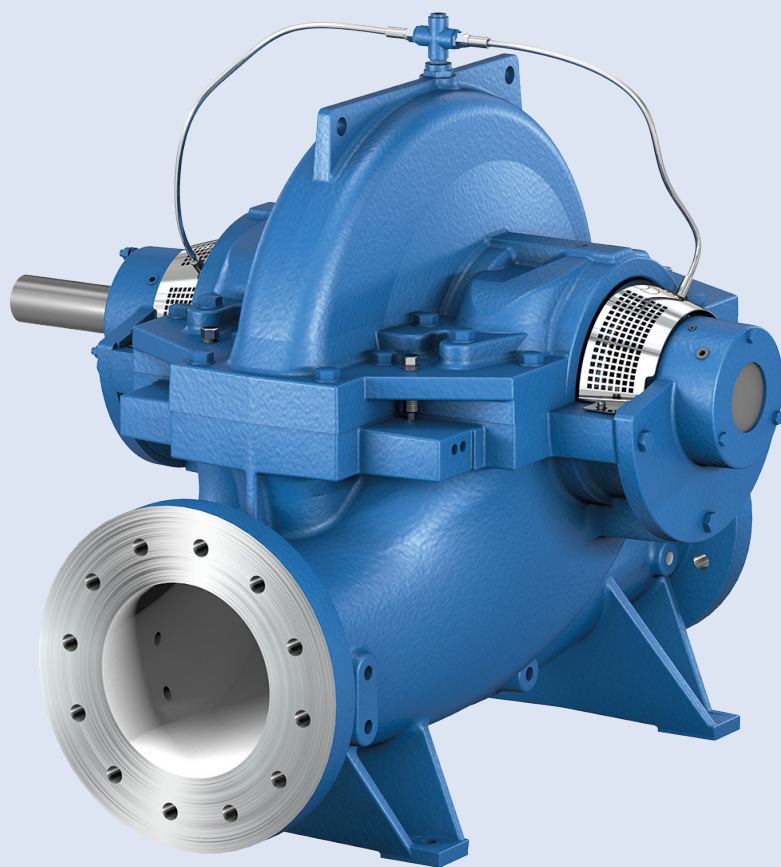

Certified to
NSF/ANSI 61


Applications:

For handling pure, raw and stormwater as well as seawater in:

- Water works
- Irrigation and drainage pumping stations
- Power Stations
- Industrial water supply
- Fire fighting systems
- Marine and offshore engineering
- General applications in the petrochemical industry
- Seawater desalination

For more information, visit:
ksb.us.com

Omega / Omega V – Axially Split Volute Casing Pump

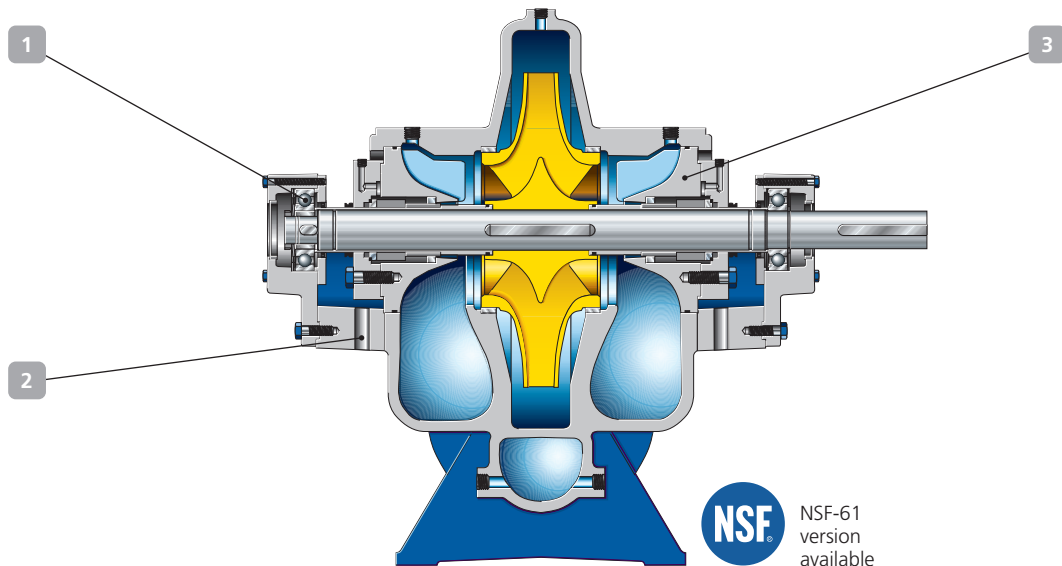

1 High operating reliability

Thanks to the double-entry impeller (compensating the axial forces) the load on the generously dimensioned, pre-loaded, maintenance-free bearings is minimal.

2 Low maintenance costs

- The combination of solid bearing brackets, a short and rigid shaft, and pre-loaded bearings guarantees low vibrations and long operating lives of bearings, seals and coupling.
- Corrosion and abrasion resistant materials ensure excellent service life for shaft protecting sleeves, impeller/casing wear rings, and impeller.

3 Service-friendly design

- The self-centering upper part of the casing and the preloaded rotor allow for cover and rotor assembly without any adjustments.
- For maintenance, the cover's hexagon head bolts are completely removed from the casing. The casing split flange can therefore be easily and thoroughly cleaned, and the inside of the pump is freely accessible.

Reliable sealing

The solid casing split flange at the upper and lower casing part ensures reliable and trouble-free sealing of the upper and lower casing halves.

Materials*

Volute casing	Grey cast iron / nodular cast iron / duplex steel
Impeller	Bronze / duplex steel
Shaft	Stainless steel / duplex steel
Shaft protecting sleeves	Stainless steel / duplex steel
Casing wear rings	Bronze / duplex steel
Impeller wear rings (optional)	Bronze / stainless steel / duplex steel

Technical data

Pump sizes	DN 80 – 350	3 to 15 in
Capacity	Up to 2,880 m ³ /h	Up to 19,375 gpm
Discharge head	Up to 210 m	Up to 689 ft
Operating pressure	Up to 25 bar	Up to 363 psi
Temperature ¹	Up to 80° C	Up to 284° F

Automation available

¹Temperatures up to 284 °F on request



PUFFER Rotating Equipment

Pumps & Parts ▪ Pump Skids ▪ Repairs & Services

12305 Kurland Dr, Houston, TX 77034

RotatingEquipment@puffer.com 281-240-2000



Authorized Sales Partner